

Yamato[®]

Made in Japan

VC2700 **M** series

Cylinder Bed Interlock Stitch Machine

Yamato's "Made in Japan" VC series, which have good reputation for the sewing quality, enable you to have more stable product quality. Furthermore, the machines present you highly efficient production.



VC3711MUT

VC2713MUT/ST



ISO9001:2000
JQA-QM6412

YAMATO "Non-stain" technology brings you a solution for "Clean" finish & high efficiency.



1. "Non-stain" minimizes oil stains on your products

→ The oil seal, which avoids oil from leaking at needle bar area, is used to prevent oil stains on materials (PAT.P)



Preventing oil from leaking at the cylinder area!



2. Saving — "Non-stain" increases productivity

→ "Non-stain" finish minimizes your loss, such as downtime and extra cost caused by spot removing operation.



3. Good performance and long life – durable machines

→ Yamato "Non-stain" technology will not sacrifice performance and durability of machines, but keep the machine running smoothly at high speed for long life. (depending on the frequency of use).




Machines Keep high quality!

You can obtain finished garments without oil stains.

This is the Yamato's Made in Japan "Non-stain" structure.

Further to the **'Non-stain'** of the **VC2700M** series,

- 1. Yamato **VC series**, which have been appreciated improving quality for long years by major apparel manufacturers, ensure fine quality finish as well as uniform quality of finished garments.
- 2. Yamato **VC2700M series**, that are equipped with hemming guides and covering guides as standard, are applicable for different sewing operations with little downtime.

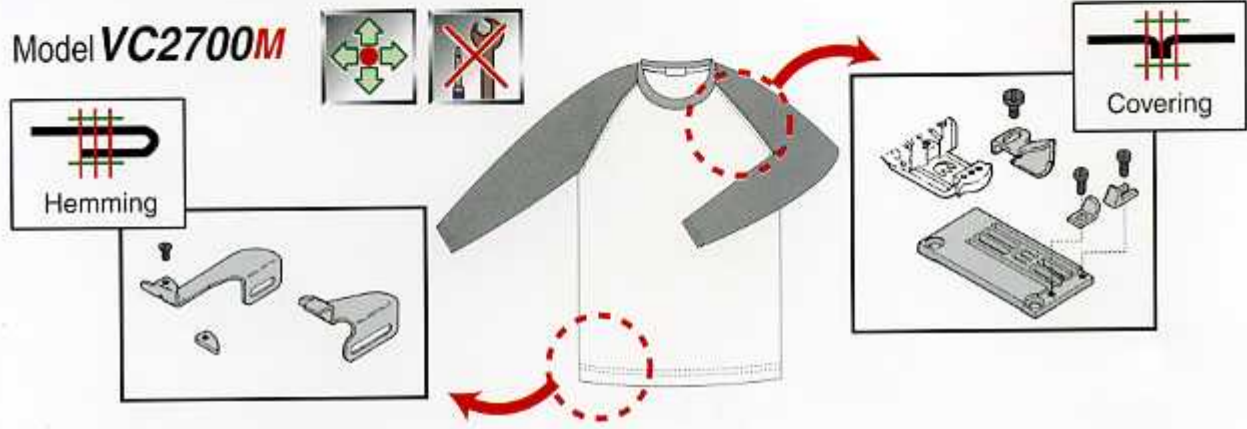





Adjusting stitch length by Pushbutton
The stitch length is simply and quickly adjusted by a pushbutton system.



Simple adjustment ! Micro -adjustable and lever -adjustable differential feeds are equipped as standard.



The differential ratio is simply adjusted by the Adjusting - knob and/or the differential feed control lever. The adjusting-knob can be fixed by the rock screw after the differential ratio is changed. The differential lever is adjusted by either a foot pedal or a knee lever during sewing. Furthermore, adjusting-knob is available as the Micro adjuster by using both the knob and the lever at the same time.

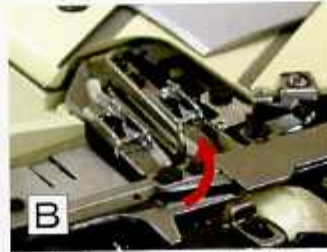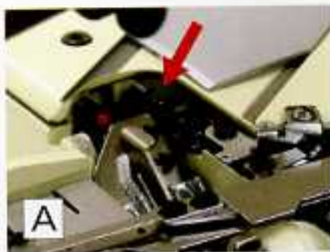


Easy threading and trouble free for thread winding around the thread take - up cam

Easy threading by swing - up type looper thread take - up eyelet.

A: Setting for sewing

B : Being swing - up for threading

The special blush prevents the thread from winding around the looper thread take-up area (Patented)

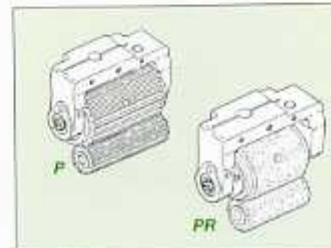

Pullers for attaching Elastic tapes
Using pullers, you can obtain uniform quality of finished garments in attaching elastic tapes with hemming operations. Various kinds of pullers are available, for example nylon gear pullers and flat rubber roller type pullers.



Small cylinder bed and enough space for the right side from the needle. The small cylinderbed (cylinder circumference as standard model, without pullers: 280mm) offers wide applications for small cylinder operations such as neckholes and sleeves.

Besides, the small cylinder bed, which keeps the same size until 80mm to the right space from center of needle, enables easy wide hem operations and smooth flow of materials and there is enough space to attach various fabric guides. * Cylinder circumference, with pullers : 340mm

Interchangeable Oil Filter
Interchangeable paper oil filter ensures clean oil.



There is no problem in sewing with synthetic fiber threads and synthetic fiber materials. To avoid thread breakage and skip stitch, the HR device (silicone supplying unit for needle point) and the SP device (silicone supplying unit for needle thread) are equipped as standard.

VC2700M

3 needle cylinder bed interlock stitch machine

Applicable for general sewing operations such as hemming, covering, and decorative stitches as standard



VC2713M

3 needle cylinder bed interlock stitch machine for covering

A submodel for covering operations





Sewing Parts and Fabric Guides According to Various Seam Style:

VC2713M -1□□M-K4N

Covering Style

Feed Layout

Coarseness of Feed Dogs

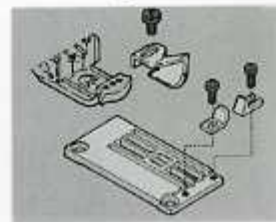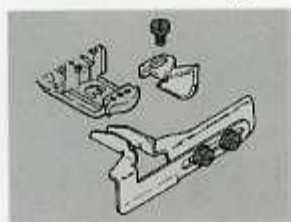

VC3711M

3 needle cylinder bed interlock stitch machine with left hand fabric trimmer

Equipped with a fabric trimmer to trim a folded edge of hem for uniform finish.



VC2735MP(PR)

3 needle cylinder bed interlock stitch machine for attaching elastic band with right hand fabric trimmer & puller

A submodel for attaching pre-closed plane elastic bands on waist of men's brief, etc. Equipped with a right hand fabric trimmer to trim an edge of body fabric for neat finish.

